

# SAPLAST

## VEKAMOTION 82

Sliding system




### PERFORMANCE

	Uw calculation	EN ISO 100077-2 (1,2 W /m <sup>2</sup> K)
	Waterproofing	EN 12208 (class 7 A)
	Wind resistance	EN 12210 (class C2/B3 )
	Air permeability	EN 12207 (class 4)
	Sound insulation	EN ISO 717 1 (Rw=30 - 47 dB)

Manufacture and installation of windows, doors and curtain walls in PVC and aluminium. Manufacture and installation of insulated glass units.



# VEKAMOTION 82

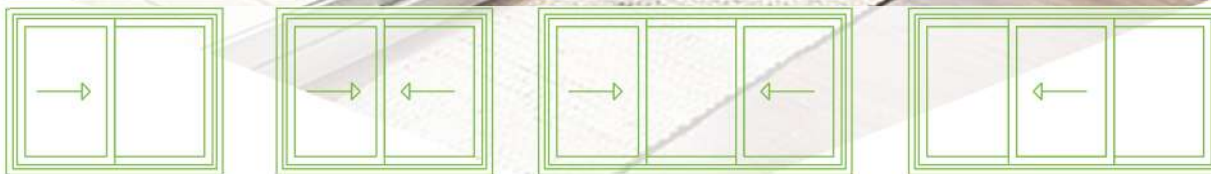

\*opening

▶ Thanks to the innovative construction made of Class A profile, you are always protected: from wind and weather disasters, heat loss, noise, and unwanted visitors.

▶ In addition to the high-quality profiles, the reason for this lies in the large, continuous steel reinforcements within the frame. VEKAMOTION 82 thus enables the production of large elements with modern, heavy glazing for thermal insulation.

▶ With the VEKAMOTION 82 system, you bring modern living comfort bathed in light into your home. Large glass surfaces with narrow visible frames open up your living space and allow for a smooth transition to the outdoor area.

▶ VEKAMOTION 82 seamlessly blends into the architecture of your home. For a perfect impression, you can also add individual accents beyond the classic white color. The unique multitude of surface options that are easy to maintain allows you to choose the shade of color and material appearance according to your preferences.

## TECHNICAL SPECIFICATIONS

SYSTEM	MATERIAL	DEPTH OF FRAME	DEPTH OF LEAF	GLAZING RANGE	WEIGHT OF LEAF	MAXIMUM SIZES OF THE STRUCTURE
VEKAMOTION 82	PVC/aluminium	194mm	/ 82 mm	/ max-54mm	to 200 kg	6000/2700 mm

