

# SAPLAST

## MILL 45 HARMO

Sliding system




### PERFORMANCE

	Uw calculation	EN 12208 (class 6A)
	Wind resistance	EN 12210 (class C3 /B3)
	Air permeability	EN 12207 (class 2)

Manufacture and installation of windows, doors and curtain walls in PVC and aluminium. Manufacture and installation of insulated glass units.



# MILL 45 HARMO

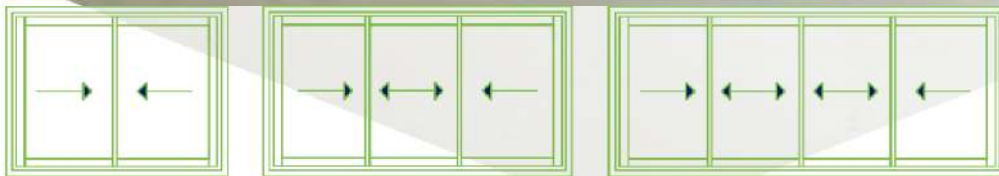

\*opening

- ▶ Series is intended to be used in production sliding windows and doors on facilities which do not require high level of thermal insulation.
- ▶ It is characterized with simplicity, variety of production typology and it is aesthetically acceptable with modern profile contours.
- ▶ Sash structure enables hardware installation with locking in multiple points.

## TECHNICAL SPECIFICATIONS

SYSTEM	MATERIAL	DEPTH OF FRAME	DEPTH OF LEAF	GLAZING RANGE	WEIGHT OF LEAF	MAXIMUM SIZES OF THE STRUCTURE
MODERN SLIDE	aluminium	45-81mm	/ 28 mm	/ -20 mm	to 110 kg	1800/2300 mm

